


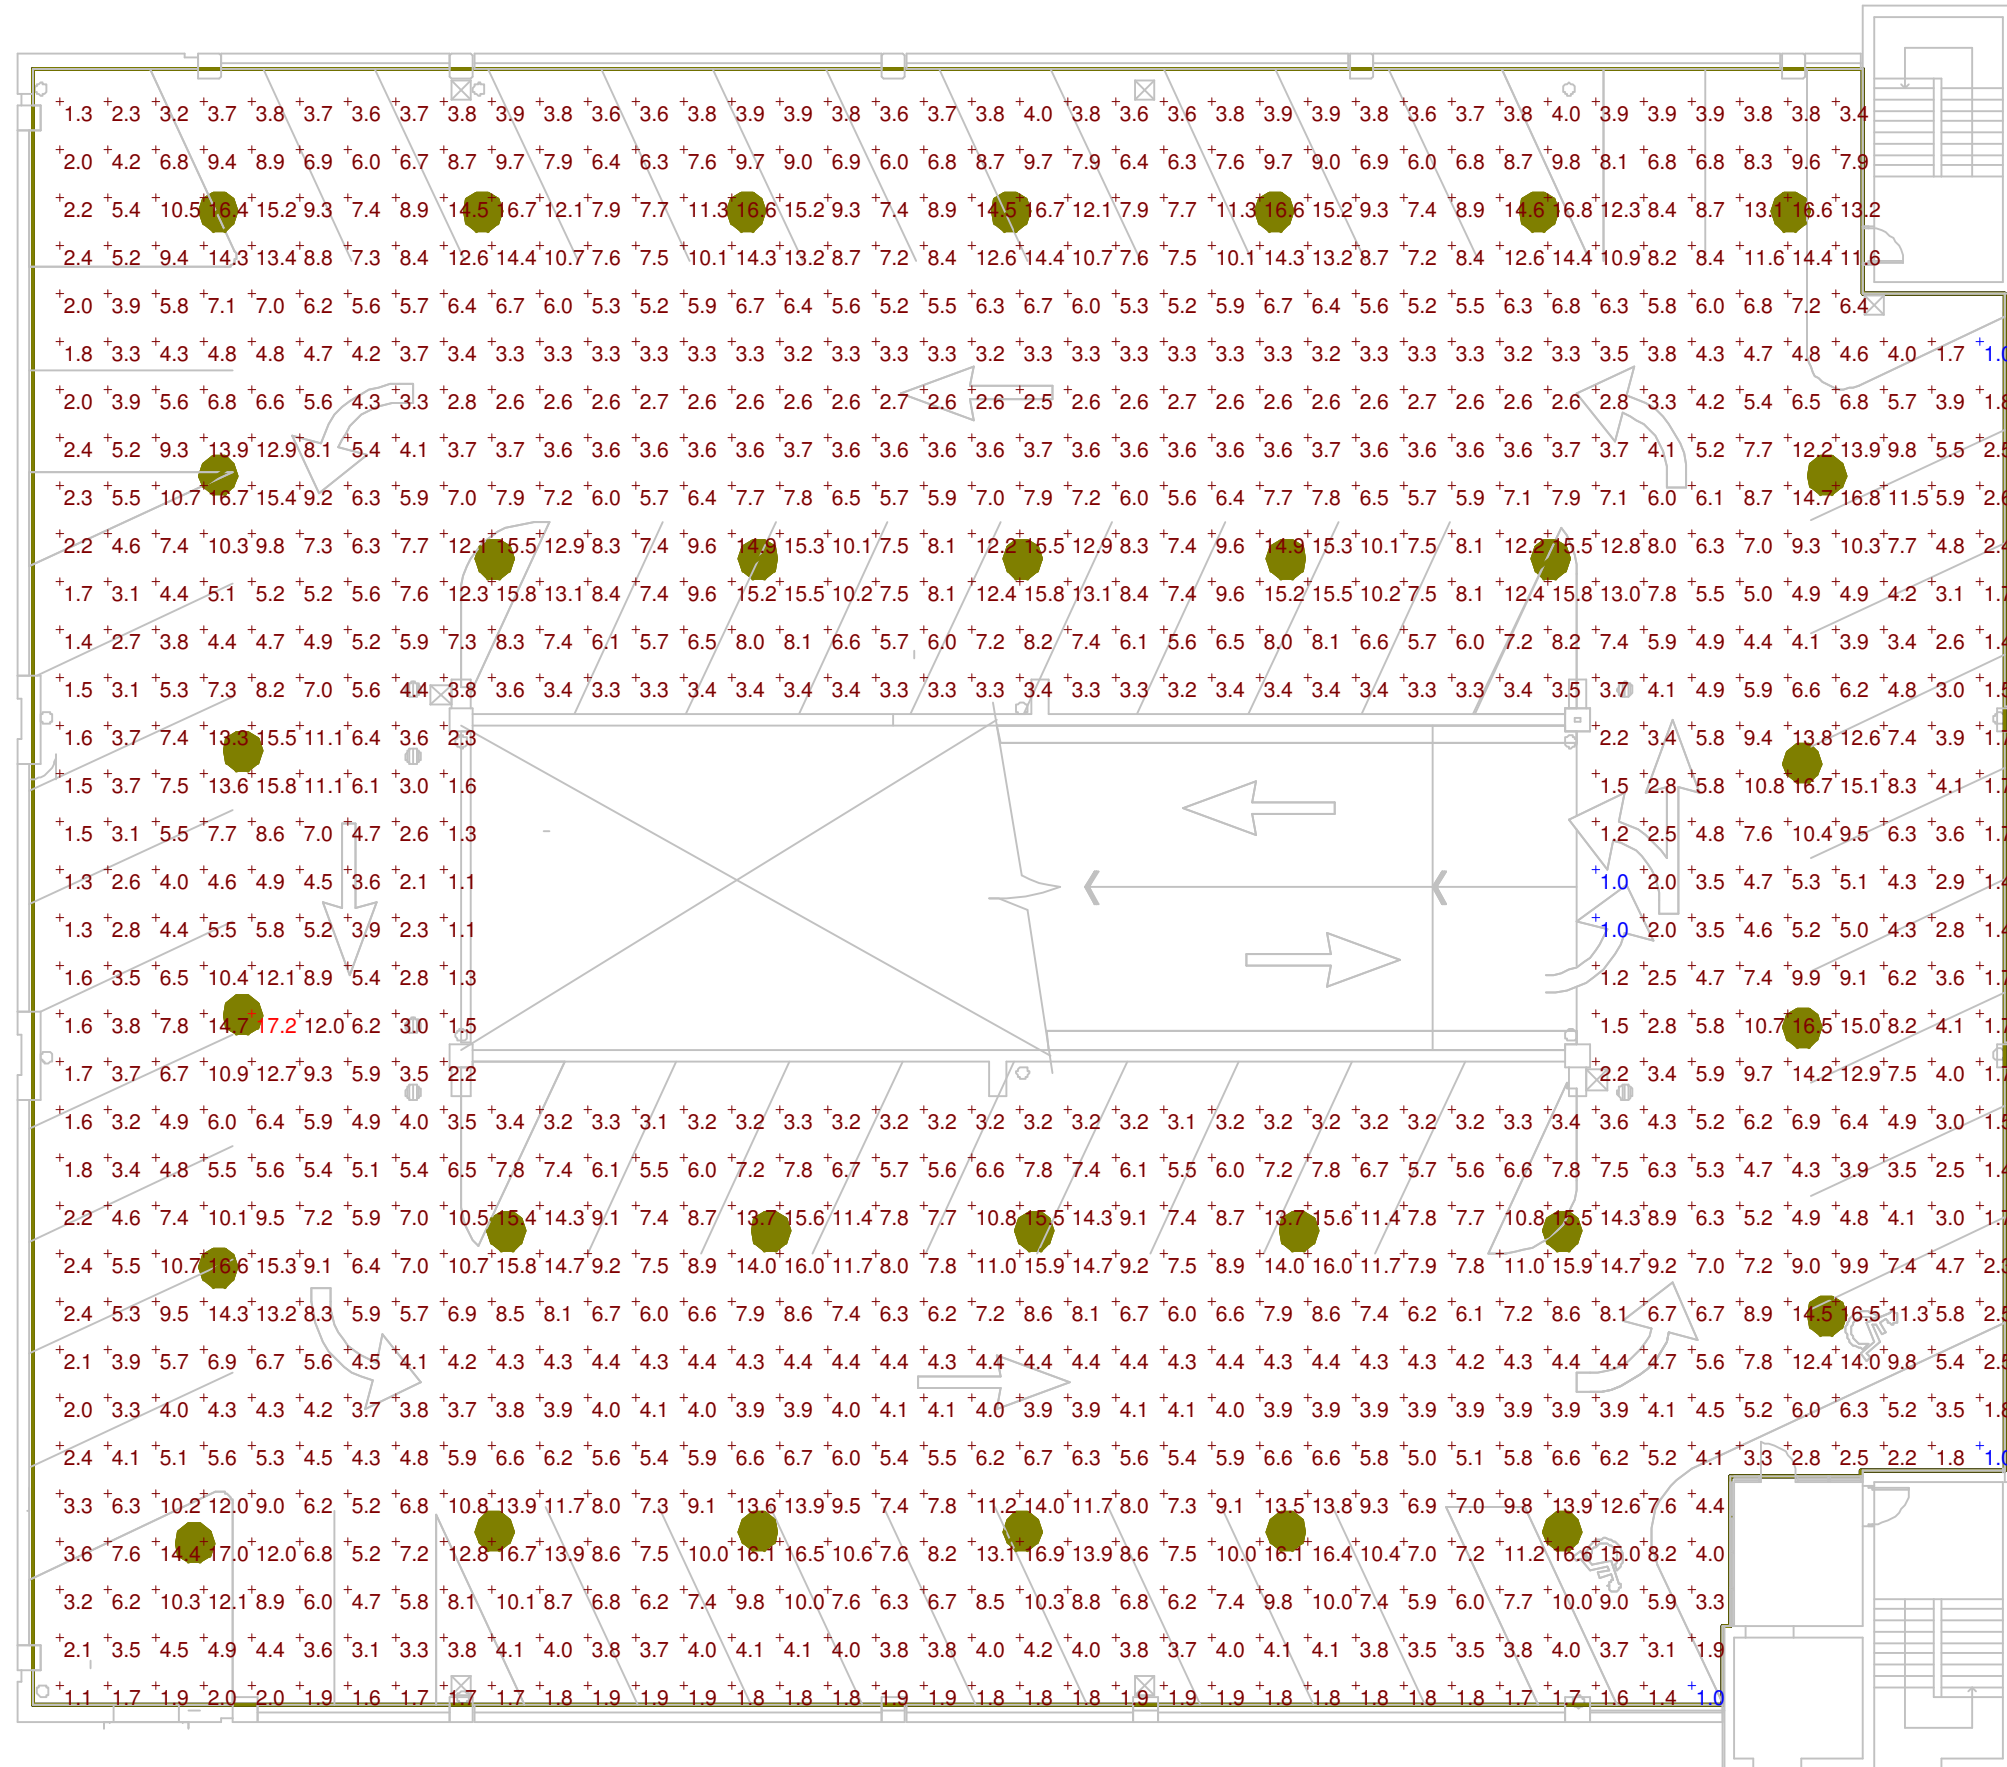
LUMINAIRE SCHEDULE									
Symbol	Label	Qty	Catalog Number	Description	Lamp	File	Lumens	LLF	Watts
	D	31	PGR 2/70TRT	PARKING GARAGE LUMINAIRE WITH RECTANGULAR, CUTOFF DISTRIBUTION.	TWO 70-WATT TRIPLE TUBE COMPACT FLUORESCENT, HORIZONTAL POSITION.	PGR_2_70TRT .ies	5200	0.75	148

STATISTICS						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
area summary@floor	+	6.5 fc	17.2 fc	1.0 fc	17.2:1	6.5:1

NOTES

1. Readings shown are in units of maintained footcandles.
2. Total light loss factor = See luminaire schedule
3. Test plane = 0' aff
4. Ceiling height = 10' aff
5. Fixture mounting height = 8.5' aff
6. Fixture spacing = See plan view
7. Reflectance = 10/10/10
8. This photometrics layout was calculated using specific criteria, any deviation from stated parameters will effect actual performance.
9. These lighting calculations are not a substitute for independent engineering analysis of lighting system suitability and safety.

POWER DENSITY STATISTICS				
Name	# Luminaires	Total Watts	Area	Density
Power Density Zone # 1	31	4588.00 W	21736.24 ft ²	0.21 W/ft ²



Plan View
Scale 1" = 16'