


CA TITLE 24 2013 DESIGN GUIDE

PUBLIC RESTROOM WITH EMERGENCY & nLIGHT ENABLED FIXTURES

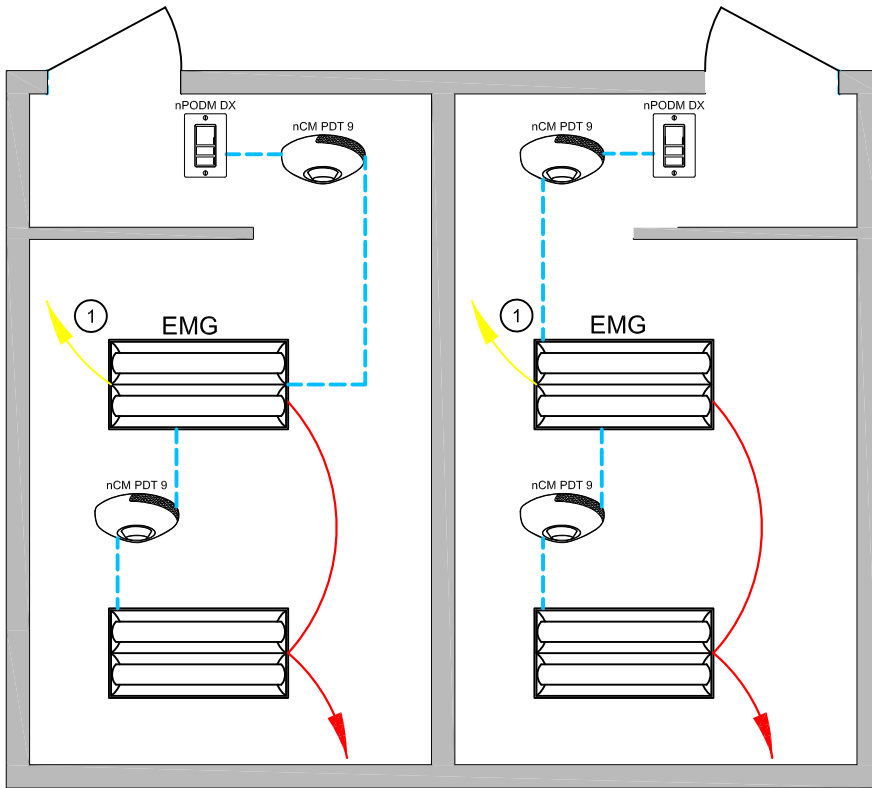

SEQUENCE OF OPERATION:

LIGHTS

- ALL LIGHTS ARE DIMMABLE
- ALL FIXTURES ARE CONTROLLED TOGETHER (PER ROOM)
- MAXIMUM LEVEL CAN BE LIMITED TO 80%
- OPTIONAL AUTOMATIC LUMEN COMPENSATION

OCCUPANCY

- LIGHTS AUTOMATICALLY TURN ON WHEN OCCUPANT ENTERS (OR OPTIONALLY CAN BE CONFIGURED TO COME ON AUTOMATICALLY TO 50%)
- LIGHTS AUTOMATICALLY TURN OFF WHEN ROOM BECOMES VACANT

MANUAL

- MASTER ON/OFF & RAISE/LOWER CONTROL OF LIGHTS

ADDITIONAL OPTIONS:

- SURFACE OR RECESSED MOUNT SENSORS ALSO AVAILABLE
- ROOM CAN BE CONNECTED TO nLIGHT BACKBONE TO ENABLE NET-WORK CONTROL OR ADR (AUTOMATIC DEMAND RESPONSE)

DIAGRAM LEGEND

CAT-5e CABLE

LINE VOLTAGE WIRES

LINE POWER

EM POWER

BILL OF MATERIAL (per room)

QTY	PRODUCT #	DESCRIPTION
1	VARIES	nLIGHT ENABLED FIXTURE
1	VARIES	nLIGHT ENABLED FIXTURE WITH EMG OPTION
1	nPODM DX	ON/OFF & RAISE/LOWER WALL POD
2	nCM PDT 9	DUAL TECHNOLOGY OCCUPANCY SENSOR

SUPPORTS THE FOLLOWING REQUIREMENTS:

FULL AUTO-OFF VIA OCCUPANCY SENSOR (SECTION 130.1c)

LOCAL SWITCH (SECTION 130.1a)

MULTI-LEVEL/ DIMMING CONTROL (SECTION 130.1b)

AUTOMATIC DEMAND RESPONSE (ADR) READY (SECTION 130.1e)