


CA TITLE 24 2013 DESIGN GUIDE

PRIVATE RESTROOM WITH EMERGENCY & nLIGHT ENABLED FIXTURES

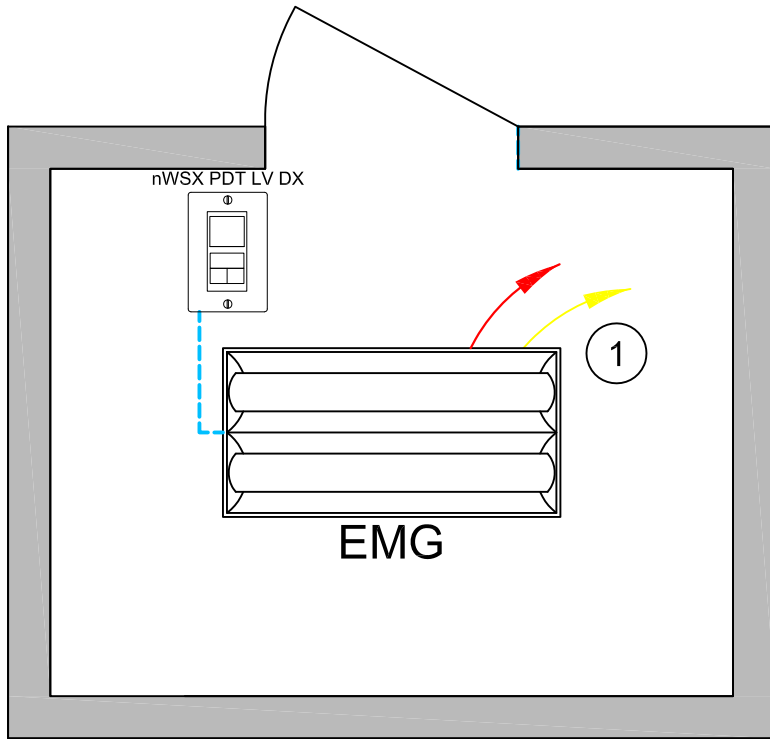

SEQUENCE OF OPERATION:

LIGHTS
 - ALL LIGHTS ARE DIMMABLE
 - MAXIMUM LEVEL CAN BE LIMITED TO 80%

OCCUPANCY
 - LIGHTS AUTOMATICALLY TURN ON WHEN OCCUPANT ENTERS (OR CAN BE CONFIGURED TO BE AUTO ON 50%)
 - LIGHTS AUTOMATICALLY TURN OFF WHEN SPACE BECOMES VACANT

MANUAL
 - MASTER ON/OFF & RAISE /LOWER CONTROL OF ENTIRE SPACE

ADDITIONAL OPTIONS:
 - SURFACE OR RECESSED MOUNT SENSORS ALSO AVAILABLE
 - SPACE CAN BE CONNECTED TO nLIGHT BACKBONE TO ENABLE NET-WORK CONTROL OR ADR (AUTOMATIC DEMAND RESPONSE)

DIAGRAM LEGEND	
	CAT-5e CABLE
	LINE VOLTAGE WIRES
	LINE POWER
	EM POWER

BILL OF MATERIAL		
QTY	PRODUCT #	DESCRIPTION
1	VARIES	nLIGHT ENABLED FIXTURE WITH THE EMG OPTION
1	nWSX PDT LV DX	DUAL TECHNOLOGY OCCUPANCY WALL SWITCH W/ RAISE / LOWER

SUPPORTS THE FOLLOWING REQUIREMENTS:

FULL AUTO-OFF VIA OCCUPANCY SENSOR (SECTION 130.1c)

LOCAL SWITCH (SECTION 130.1a)

MULTI-LEVEL/ DIMMING CONTROL (SECTION 130.1b)

AUTOMATIC DEMAND RESPONSE (ADR) READY (SECTION 130.1e)