


ASHRAE DESIGN GUIDE
90.1- 2010

PRIVATE BATHROOM WITH nLIGHT ENABLED FIXTURES

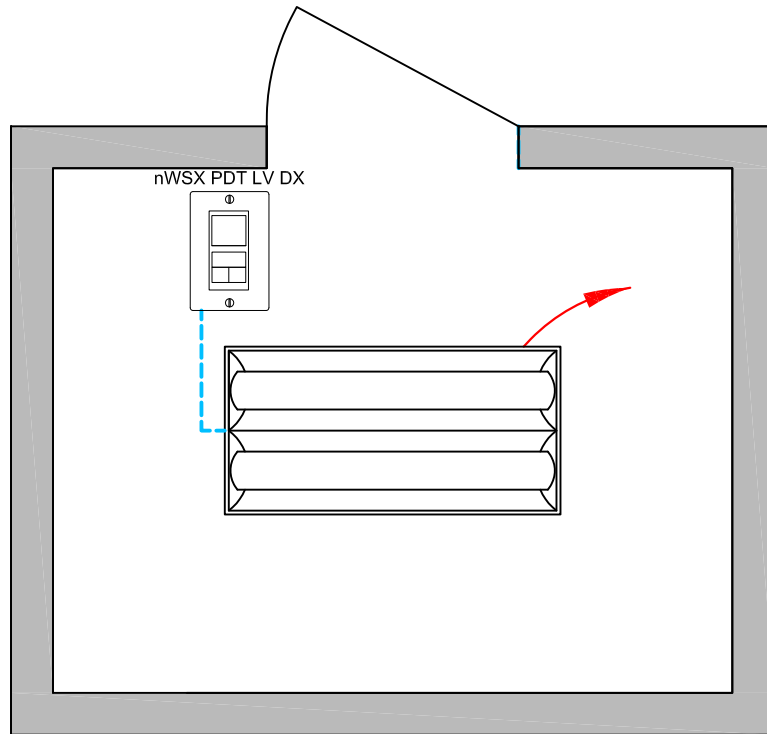

SEQUENCE OF OPERATION:

LIGHTS

- ALL LIGHTS ARE DIMMABLE
- MAXIMUM LEVEL CAN BE LIMITED TO 80%

OCCUPANCY


- LIGHTS AUTOMATICALLY TURN ON WHEN OCCUPANT ENTERS (OR CAN BE CONFIGURED TO BE AUTO ON 50%)
- LIGHTS AUTOMATICALLY TURN OFF WHEN SPACE BECOMES VACANT

MANUAL

- MASTER ON/OFF & RAISE /LOWER CONTROL OF ENTIRE SPACE

ADDITIONAL OPTIONS:

- SURFACE OR RECESSED MOUNT SENSORS ALSO AVAILABLE
- SPACE CAN BE CONNECTED TO nLIGHT BACKBONE TO ENABLE NETWORK CONTROL OR ADR (AUTOMATIC DEMAND RESPONSE)
- FOR EMERGENCY LIGHTING CONTROL ADD n80EMG OR n100EMG TO FIXTURE OPTION



BILL OF MATERIAL

QTY	PRODUCT #	DESCRIPTION
1	VARIES	nLIGHT ENABLED FIXTURES
1	nWSX PDT LV DX	ON/OFF & RAISE/LOWER DUAL TECH OCCUPANCY SWITCH

SUPPORTS THE FOLLOWING REQUIREMENTS:

