




design select™

— R · E · G · I · O · N · A · L —



Visit www.acuitydistributorcenter.com and look for the badge to view which products can be configured at your local RMDC

2 Regional Manufacturing & Distribution Centers produce and ship in **2 days or less!**

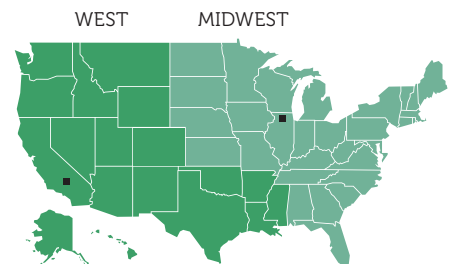

Western Region

Category	Description	Page
Commercial Indoor		
BLT Series, LED Volumetric Troffer	2BLT2, 2BLT4	3
Industrial		
Compact Pro™ LED High Bay	CPHB	4
I-BEAM® Configurable LED High Bay	IBG, IBGN	5-6
Downlighting		
Open and Wallwash LED Downlight	LDN4, LDN6	7

Midwestern Region

Category	Description	Page
Commercial Indoor		
BLT Series, LED Volumetric Troffer	2BLT2	8
BLT Series, LED Volumetric Troffer	2BLT4	9
Industrial		
I-BEAM® Configurable LED High Bay	IBG	10
Compact Pro™ LED High Bay	CPHB	11



BLT Series, 2BLT2

2' x 2' LED Volumetric Troffer
Max Order QTY 150 PCS

ORDERING INFORMATION

Specifications subject to change.

Example: 2BLT2 33L ADP GZ1 LP835

Series	Air Function	Lumens ¹	Diffuser	Voltage	Driver
2BLT2 2x2 BLT	(blank) Static	Standard efficiency (>100 LPW) 33L 3300 40L 4000	ADP Curved, Linear Prisms ADSM Curved, Smooth	(blank) MVOLT	EZ1 eldoLED dims to 1% (0-10 volt dimming) GZ1 Dims to 1% (0-10V dimming) GZ10 Dims to 10% (0-10V dimming)

Color Temperature

Options

LP835 82CRI, 3500K	E10WLCP EM Self-diagnostic battery pack, 10W Constant Power, CEC compliant
LP840 82CRI, 4000K	PWS1836 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit
	PWS1856LV 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit w/low voltage purple and gray wires

Notes

1. Approximate lumen output.



BLT Series, 2BLT4

2' x 4' LED Volumetric Troffer

ORDERING INFORMATION

Specifications subject to change.

Example: 2BLT4 40L ADP GZ1 LP840

Series	Air Function	Lumens ¹	Diffuser	Voltage	Driver
2BLT4 2x4 BLT	(blank) Static	Standard efficiency (>100 LPW) 30L 3000 40L 4000 48L 4800 60L 6000	ADP Curved, Linear Prisms ADSM Curved, Smooth	(blank) MVOLT	EZ1 eldoLED dims to 1% (0-10 volt dimming) GZ1 Dims to 1% (0-10V dimming) GZ10 Dims to 10% (0-10V dimming)

Color Temperature

Options

LP835 82CRI, 3500K	E10WLCP EM Self-diagnostic battery pack, 10W Constant Power, CEC compliant
LP840 82CRI, 4000K	PWS1836 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit
	PWS1856LV 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit w/low voltage purple and gray wires

Notes

1. Approximate lumen output.



CPHB

Compact Pro™ LED High Bay
Max Order QTY 150 PCS

ORDERING INFORMATION

Specifications subject to change.

Example: CPHB 24000LM SEF GCL MD 120 GZ10 40K 80CRI DWH

Series	Lumens		Performance Package	Lens		Distribution		Voltage		Driver	Color Temperature	
CPHB	12000LM	12,000	SEF Standard efficiency	GCL	Glare Control Lens	MD	Medium	MVOLT	120-277V	GZ10 0-10V dimming	40K	4000K
	15000LM	15,000						120	120V		50K	5000K
	18000LM	18,000						208	208V			
	24000LM	24,000						240	240V			
	30000LM	30,000						277	277V			

Color Rendering Index	Options		Finish
80CRI 80 CRI	<p><u>Flexible Systems:</u></p> <p>OCS RELOC® OnePass selectable cable 6' installed †</p> <p><u>Cord Sets:</u></p> <p>CPTLW 6' white damp location cord with twist-lock plug (voltage will match fixture; Not avail with 208V or 240V)</p> <p>CNPW 6' white cord, no plug</p> <p>CNPW12FT 12' White cord, no plug</p> <p>CNPW15FT 15' White cord, no plug</p>		DWH Gloss white
	<p><u>Individual Controls (LSXR):</u></p> <p>LSXR6 ADC 360°integral high mount motion sensor with dimming & switching photocell</p>		

† Option Value Ordering Restrictions

Option Value	Ordering Restrictions
Cord Sets	Must specify voltage on cord sets with plugs.
Individual Controls (LSXR)	Comes standard with SPD. This sensor configuration is suitable for minimum ambient temperature of 14°F (-10°C). Not available with other controls.
OCS	Must specify voltage. Dry Location listed only. Not available with Battery Options.

**IBG**

I-BEAM® Configurable LED High Bay
Max Order QTY 150 PCS

ORDERING INFORMATION

Specifications subject to change.

Example: IBG 24000LM SEF AFL GND MVOLT GZ10 40K 80CRI DWH

Series		Lumens		Performance Package		Lens		Distribution		Voltage		Driver			
IBG	I-BEAM® IBG Configurable LED High Bay	18000LM	18,000LM	SEF	Standard efficiency	ACL	Clear Acrylic	GND	General	120	120V	GZ10	0-10V dimming		
		24000LM	24,000LM			AFL	Acrylic Frosted			277	277V				
		30000LM	30,000LM			L/ LENS	Less Lens			HVOLT	347-480V				
		36000LM	36,000LM							MVOLT	120-277V				

Color Temperature		CRI		Options	
40K	4000K	80CRI	80 CRI	<i>Emergency Batteries</i> IE20WCPHE Iota® 20W emergency battery pack, Certified in CA Title 20 MAEDBS	
50K	5000K			<i>Flexible Systems</i> OCS ¹ RELOC® OnePass® 6FT installed	

Options		Primary Finish	
<i>Individual Controls*</i>		DWH	Gloss white
LSXR6 HL	360° integral high mount motion sensor with High/Low/(Off) occupancy operation (For High/Low only, bypass relay		
LSXR6 ADC	360° integral high mount motion sensor with On/Off occupancy operation with auto dimming photocell		
LSXR6	360° integral high mount motion sensor with standard On/Off operation		

Notes

1. Must specify voltage.

**IBGN**

I-BEAM® Configurable LED High Bay Narrow Body
Max Order QTY 150 PCS

ORDERING INFORMATION

Specifications subject to change.

Example: IBGN 24000LM SEF AFL GND MVOLT GZ10 40K 80CRI DWH

Series	Lumens	Performance Package	Lens	Distribution	Voltage	Driver
IBGN I-BEAM® IBG Configurable LED High Bay, Narrow Body	24000LM 24,000LM 30000LM 30,000LM 36000LM 36,000LM	SEF Standard efficiency	ACL Clear Acrylic AFL Acrylic Frosted L/ LENS Less Lens	GND General	120 120V 277 277V HVOLT 347-480V MVOLT 120-277V	GZ10 0-10V dimming

Color Temperature	CRI	Options
40K 4000K	80CRI 80 CRI	Emergency Batteries
50K 5000K		IE20WCPHE Iota® 20W emergency battery pack, Constant Power, High Efficiency, Certified in CA Title 20 MAEDBS
		Flexible Systems
		OCS ¹ RELOC® OnePass® 6FT installed
		Cord Sets
		CNPW 6FT white cord, no plug

Options**Primary Finish***Individual Controls**

LSXR6 HL	360° integral high mount motion sensor with High/Low/(Off) occupancy operation (For High/Low only, bypass relay
LSXR6 ADC	360° integral high mount motion sensor with On/Off occupancy operation with auto dimming photocell
LSXR6	360° integral high mount motion sensor with standard On/Off operation

DWH Gloss white

Notes

1. Must specify voltage.



LDN4

4" Open and Wallwash LED Downlight
Max Order QTY 100 PCS

ORDERING INFORMATION

Specifications subject to change.

Example: LDN4 30/10 LO4AR LSS MVOLT GZ1

Series	Color Temperature	Lumens	Aperture/Trim Color	Finish	Voltage	Driver
LDN4 4" round	30/ 3000K	10 1000 lumens	LO4AR Round Clear Reflector/Flange	LSS Semi-specular	MVOLT Multi-volt	GZ1 Dims to 1%, 0-10V dimming
	35/ 3500K	15 1500 lumens	LO4WR Round White Reflector/Flange			GZ10 Dims to 10%, 0-10V dimming
	40/ 4000K	20 2000 lumens	LW4AR Wall Wash Clear Reflector/Flange			
			LW4WR Wall Wash White Reflector/Flange			

Wattages

		30K/80CRI		35K/80CRI		40K/80CRI	
Lumen Output	Wattage	Delivered Lumens	LPW	Delivered Lumens	LPW	Delivered Lumens	LPW
1000LM	13	1344	108	1375	110	1408	112
1500LM	19	1961	105	2007	106	2055	108
2000LM	25	2471	99	2528	101	2588	103



LDN6

6" Open and Wallwash LED Downlight
Max Order QTY 100 PCS

ORDERING INFORMATION

Specifications subject to change.

Example: LDN6 30/10 LO6AR LSS MVOLT GZ1

Series	Color Temperature	Lumens	Aperture/Trim Color	Finish	Voltage	Driver
LDN6 6" round	30/ 3000K	10 1000 lumens	LO6AR Round Clear Reflector/Flange	LSS Semi-specular	MVOLT Multi-volt	GZ1 Dims to 1%, 0-10V dimming
	35/ 3500K	15 1500 lumens	LO6WR Round White Reflector/Flange			GZ10 Dims to 10%, 0-10V dimming
	40/ 4000K	20 2000 lumens	LW6AR Wall Wash Clear Reflector/Flange			
			LW6WR Wall Wash White Reflector/Flange			

Wattages

		30K/80CRI		35K/80CRI		40K/80CRI	
Lumen Output	Wattage	Delivered Lumens	LPW	Delivered Lumens	LPW	Delivered Lumens	LPW
1000LM	12	1360	112	1383	113	1400	113
1500LM	19	2004	108	2038	109	2063	110
2000LM	25	2547	103	2590	104	2622	104

**BLT Series, 2BLT2**

2' x 2' LED Volumetric Troffer
Max Order QTY 200 PCS

ORDERING INFORMATION

Specifications subject to change.

Example: 2BLT2 33L ADP EZ1 LP835

Series		Air Function		Lumens ¹		Diffuser		Voltage		Driver	
2BLT2	2x2 BLT	(blank)	Static	Standard efficiency (>100 LPW)		ADP	Curved, Linear Prisms	(blank)	MVOLT	EZ1	eldoLED dims to 1% (0-10 volt dimming)
				33L	3300	ADSM	Curved, Smooth	120	120V	GZ10	Dims to 10% (0-10V dimming)
				40L	4000	ADPT	Curved, ribbed (includes trim rings to match sensed version)	277	277V		
				48L	4800						

Color Temperature		Controls Options		Options	
LP835	82CRI, 3500K	N100	nLight without lumen management	EL14L	1400 lumen battery pack (Noncompliant with CAT20)
LP840	82CRI, 4000K	NLTAIR2 ²	nLight AIR Generation 2 enabled	PWS1836	6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit
		RES7	nLight AIR control with PIR integral occupancy sensor and automatic dimming photocell	CP ³	Chicago Plenum
		RES7PDT	nLight AIR control with PDT dual technology integral occupancy sensor and automatic dimming photocell		

Notes

1. Approximate lumen output.
2. Not available with GZ10 driver.
3. Not available with N100.

**BLT Series, 2BLT4**

2' x 4' LED Volumetric Troffer

Max Order QTY 200 PCS**ORDERING INFORMATION**

Specifications subject to change.

Example: 2BLT4 40L ADP EZ1 LP840

Series		Air Function		Lumens ¹		Diffuser		Voltage		Driver	
2BLT4	2x4 BLT	(blank)	Static	Standard efficiency (>100 LPW)		ADP	Curved, Linear Prisms	(blank)	MVOLT	EZ1	eldoLED dims to 1% (0-10 volt dimming)
				30L	3000	ADSM	Curved, Smooth	120	120V	GZ10	Dims to 10% (0-10V dimming)
				40L	4000	ADPT	Curved, ribbed (includes trim rings to match sensed version)	277	277V		
				48L	4800						

Color Temperature		Controls Options		Options	
LP835	82CRI, 3500K	N100	nLight without lumen management	EL14L	1400 lumen battery pack (Noncompliant with CAT20)
LP840	82CRI, 4000K	NLTAIR2 ²	nLight AIR Generation 2 enabled	PWS1836	6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit
		RES7	nLight AIR control with PIR integral occupancy sensor and automatic dimming photocell	CP ³	Chicago Plenum
		RES7PDT	nLight AIR control with PDT dual technology integral occupancy sensor and automatic dimming photocell		

Notes

1. Approximate lumen output.
2. Not available with GZ10 driver.
3. Not available with N100.



IBG

I-BEAM® Configurable LED High Bay
Max Order QTY 200 PCS

ORDERING INFORMATION

Specifications subject to change.

Example: IBG 24000LM SEF AFL GND MVOLT GZ10 40K 80CRI DWH

Series	Lumens	Performance Package	Lens	Distribution	Voltage	Driver
IBG I-BEAM® IBG Configurable LED High Bay	18000LM 18,000LM 24000LM 24,000LM 30000LM 30,000LM 36000LM 36,000LM 60000LM 60,000LM	SEF Standard efficiency	ACL Clear Acrylic AFL Acrylic Frosted L/ LENS Less Lens	GND General	120 120V 277 277V MVOLT 120-277V	GZ10 0-10V dimming

Color Temperature	CRI	Options
40K 4000K 50K 5000K	80CRI 80 CRI	<i>Emergency Batteries</i> IE20WCPHE Iota® 20W emergency battery pack, Certified in CA Title 20 MAEDBS <i>Flexible Systems</i> OCS¹ RELOC® OnePass® 6FT installed

Options	Primary Finish
<i>Individual Controls*</i> LSXR6 360° integral high mount motion sensor with standard On/Off operation LSXR6 HL 360° integral high mount motion sensor with high/low/(Off) occupancy operation	<i>Cord Sets</i> CNPW 6' white cord, no plug CPTLW¹ 6' white damp location cord with twistlock plug (voltage will match fixture)
	DWH Gloss white

Notes

1. Must specify voltage.

**CPHB**

Compact Pro™ LED High Bay
Max Order QTY 150 PCS

ORDERING INFORMATION

Specifications subject to change.

Example: CPHB 24000LM SEF GCL MD 120 GZ10 40K 80CRI DWH

Series	Lumens		Performance Package	Lens		Distribution		Voltage		Driver	Color Temperature	
CPHB	12000LM	12,000	SEF Standard efficiency	GCL	Glare Control Lens	MD	Medium	MVOLT	120-277V	GZ10 0-10V dimming	40K	4000K
	15000LM	15,000						120	120V		50K	5000K
	18000LM	18,000						208	208V			
	24000LM	24,000						240	240V			
	30000LM	30,000						277	277V			

Color Rendering Index		Options			Finish	
80CRI	80 CRI	<u>Flexible Systems:</u> OCS RELOC® OnePass selectable cable 6' installed † <u>Cord Sets:</u> CPTLW 6' white damp location cord with twist-lock plug (voltage will match fixture; Not avail with 208V or 240V) CNPW 6' white cord, no plug		<u>Individual Controls (LSXR):</u> LSXR6 ADC 360°integral high mount motion sensor with dimming & switching photocell		DWH Gloss white

‡ Option Value Ordering Restrictions

Option Value	Ordering Restrictions
Cord Sets	Must specify voltage on cord sets with plugs.
Individual Controls (LSXR)	Comes standard with SPD. This sensor configuration is suitable for minimum ambient temperature of 14°F (-10°C). Not available with other controls.
OCS	Must specify voltage. Dry Location listed only. Not available with Battery Options.

design select™

R - E - G - I - O - N - A - L

Need more options?

Design Select Regional products produce
and ship in 2 days or less.

Our Design Select portfolio has a more extensive
breadth of products that ship in 15 days or less.

For more information, please visit:
www.acuitybrands.com/designselect