

SEQUENCE OF OPERATION:


- LIGHTS**
- ALL LIGHTS ARE DIMMABLE
 - ALL FIXTURES ARE CONTROLLED TOGETHER (PER ROOM)
 - MAXIMUM LEVEL CAN BE LIMITED TO 80%

- OCCUPANCY**
- LIGHTS AUTOMATICALLY TURN ON WHEN OCCUPANT ENTERS
 - LIGHTS AUTOMATICALLY TURN OFF WHEN ROOM BECOMES VACANT

- MANUAL**
- MASTER ON/OFF & RAISE/LOWER CONTROL OF LIGHTS

- ADDITIONAL OPTIONS:**
- SURFACE OR RECESSED MOUNT SENSORS ALSO AVAILABLE
 - SUBSTITUTE MODEL nPP16D PA FOR DEFAULT AUTO-ON TO 50% FUNCTIONALITY
 - ROOM CAN BE CONNECTED TO nLIGHT BACKBONE TO ENABLE NETWORK CONTROL INCLUDING TIME BASED CONTROLS AND INTEGRATION WITH BUILDING MANAGEMENT SYSTEMS.
 - FOR EMERGENCY LIGHTING CONTROL ADD A NPP16 D ER PACK.

- NOTE:**
- DAYLIGHT
 - NOT REQUIRED FOR SPACES WITHOUT SIDE LIT AREAS < 250FT²

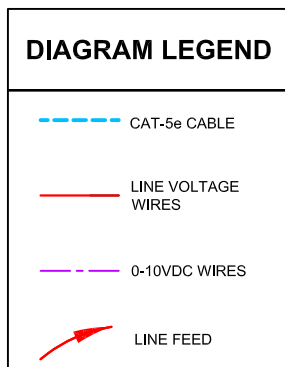

BILL OF MATERIAL (per room)

QTY	PRODUCT #	DESCRIPTION
1	nPP16 D	RELAY MODULE WITH 0-10V DIMMING OUTPUT
1	nPODM DX	ON/OFF & RAISE/LOWER WALL POD
2	nCM PDT 9	DUAL TECHNOLOGY OCCUPANCY SENSOR

SUPPORTS THE FOLLOWING REQUIREMENTS:

