



HIGHLIGHTS

- Creates drama and emphasizes its beauty as an architectural element
- Minimalistic style and modern warmth for interior decorative and wayfinding applications
- OLED direct / indirect illumination available in 90+ CRI in 3000K and 4000K



eldoLED

SPECIFICATIONS

Construction

OLED panels encased in a solid aluminum housing. OLED panels held in place by thin lip and solid or windowed back cover plate. Wall mount canopy with no exposed fasteners.

Mounting

Fastener mounting to wall recessed 2"x4" junction box (SWM) or 4" square or round junction box (WM).

Source

1 or 2 OLED Panels. Nomi STS Wall Mount is available in 2 styles: 1-panel Front or 1-panel Front / 1-panel Back. 3000K or 4000K.

Finish

Standard colors for housing are painted semi-gloss white, brushed aluminum, light bronze, or aluminum (matte). Custom Signage letters/numbers applied on diffuse mylar film in front of OLED panel. Custom braille and

raised letters/numbers applied on aluminum housing. Consult factory for custom signage options.

Electrical

Remote EldoLED 0-10V dimming driver.

Environment

Ambient operating temperature between 0° C to 40° C.

Validation

UL/cUL listed for dry locations. ADA compliant.


Warranty

3-year limited warranty. Complete warranty terms located at www.acuitybrands.com/support/customer-support/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

DIMENSIONS

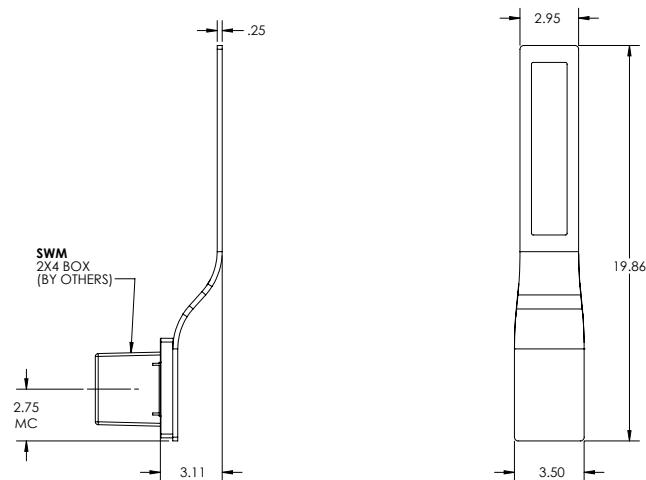

ORDERING INFORMATION Example: CALS NOMI STS 1P O30K MO MVOLT ZT SWM SGW

| Series | Form | Configuration | OLED Color Temperature | OLED Output | Voltage |
|------------------|--|---|---|--|-------------------|
| CALS NOMI | STS Straight | 1P 1 Panel 2P 2 Panels | O30K 3000K O40K 4000K <i>Note: OLED available in 90+ CRI only</i> | MO Maximum Output ML Maximum Lifetime | MVOLT 120-277 VAC |
| Control Input | Mounting | Finish | | | |
| ZT 0-10V Dimming | SWM 2"x4" Rectangular Junction Box WM Cover plate accessory for 4" square or round junction box provided. | SGW Semi-gloss White BA Brushed Aluminum | LBP Light Bronze Paint ALP Aluminum Paint | CPF Custom Paint Finish | |

PHOTOMETRIC PERFORMANCE (ESTIMATED)

Nominal Luminaire Performance at Maximum Output (MO)

| | 1P | | 2P | |
|--------------------|--------|--------|--------|--------|
| | 3000K | 4000K | 3000K | 4000K |
| Luminance (cd/m²) | 8500 | 7000 | 8500 | 7000 |
| Lumens | 254 | 200 | 508 | 400 |
| Watts | 4.56 | 4.7 | 8.6 | 8.9 |
| Efficacy (lm/W) | 55 | 42 | 59 | 45 |
| L70 lifetime (hrs) | 30,000 | 30,000 | 30,000 | 30,000 |


Nominal Luminaire Performance at Maximum Lifetime (ML)

| | 1P | | 2P | |
|--------------------|---------|---------|---------|---------|
| | 3000K | 4000K | 3000K | 4000K |
| Luminance (cd/m²) | 3000 | 3000 | 3000 | 3000 |
| Lumens | 95 | 95 | 190 | 190 |
| Watts | 1.6 | 2.2 | 3.2 | 4.4 |
| Efficacy (lm/W) | 59 | 43 | 59 | 43 |
| L70 lifetime (hrs) | 100,000 | 100,000 | 100,000 | 100,000 |

DISTRIBUTION

1P 100% FRONT

2P 50% FRONT | 50% BACK

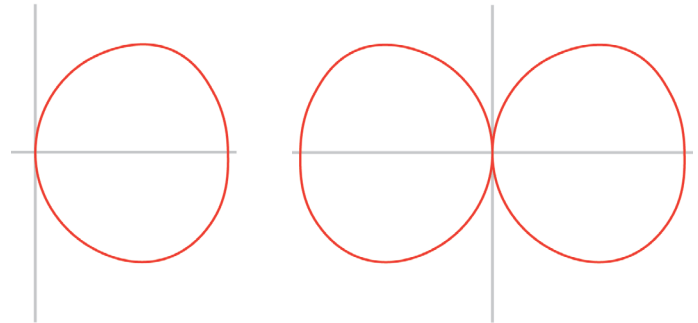

CUSTOMIZATION

Ask CALS about the following possibilities: additional mounting options, custom colors and other modifications.

