

# EPANL Series

Fully-Luminous LED Flat Panel


## Visually Appealing Yet Cost-Effective

The EPANL is a visually stunning, low profile, easy to install luminaire. The fully luminous lens provides a glare free solution creating a very comfortable environment. Add in standard 0-10V dimming and you can create the right amount of light for the space or task. With a depth of only two inches, restricted plenum space is no longer a concern. The EPANL luminaire is easy to install with great features making it ideal for many different applications.

The EPANL is available in two lumen packages and three sizes with unmatched configurations and an advantageous specification locker for a versatile solution that is DLC qualified (Standard and Premium) and eligible for utility rebates.

### Key Features:

- Lumen packages
  - 2' x 2' - 3400L
  - 2' x 4' - 4000L
  - 1' x 4' - 4000L
- CCTs: 3500K, 4000K, 5000K
- Long-life LEDs maintain 70% of their lumen output at 60,000 hours
- 0-10V driver with 10% dimming standard, as well as 1% dimming options
- MVOLT 120-277V standard

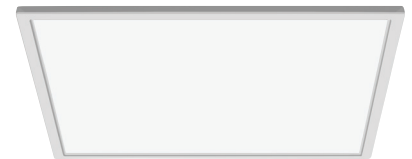

# EPANL Series LED Luminaire



- Shallow depth 0.64" panel, 2" height including the driver box
- Superior frame design, no light leakage
- IP5x rated for bug and dust protection
- Fully luminous, glare free surface
- Surface Mount and Suspension Mounting kit options available\*
- nLight enabled options\*
- Emergency driver options\*
- Pre-wire whips\*

\*Refer to the configurable Spec Sheet on the product web page for ordering information.

## Ordering Information

**EXAMPLE:** EPANL 24 40L 35K

### EPANL Series Stock Solutions

Description*	Catalog #	UPC Code	CI Code	Wattage	Pallet Quantity
2'x2' EPANL, 3400 Lumens, 3500K	EPANL 22 34L 35K	190887602647	*247U4U	31	26
2'x2' EPANL, 3400 Lumens, 3500K, High Efficiency	EPANL 22 34LHE 35K	190887602661	*247U4W	26	26
2'x2' EPANL, 3400 Lumens, 4000K	EPANL 22 34L 40K	190887602678	*247U4X	31	26
2'x2' EPANL, 3400 Lumens, 4000K, High Efficiency	EPANL 22 34LHE 40K	190887602685	*247U4Y	26	26
2'x4' EPANL, 4000 Lumens, 3500K	EPANL 24 40L 35K	190887602692	*247U50	39	13
2'x4' EPANL, 4000 Lumens, 3500K, High Efficiency	EPANL 24 40LHE 35K	190887602708	*247U51	30	13
2'x4' EPANL, 4000 Lumens, 4000K	EPANL 24 40L 40K	190887602715	*247U52	39	13
2'x4' EPANL, 4000 Lumens, 4000K, High Efficiency	EPANL 24 40LHE 40K	190887602722	*247U53	31	13
1'x4' EPANL, 4000 Lumens, 3500K	EPANL 14 40L 35K	190887602739	*247U54	39	39
1'x4' EPANL, 4000 Lumens, 3500K, High Efficiency	EPANL 14 40LHE 35K	190887602746	*247U55	31	39
1'x4' EPANL, 4000 Lumens, 4000K	EPANL 14 40L 40K	190887602753	*247U56	39	39
1'x4' EPANL, 4000 Lumens, 4000K, High Efficiency	EPANL 14 40LHE 40K	190887602760	*247U57	30	39
2'x2' EPANL, 3400 Lumens, 5000K	EPANL 22 34L 50K	'00191723811650	*263C78	31	39
2'x4' EPANL, 4000 Lumens, 5000K	EPANL 24 40L 50K	'00191723812312	*263C8C	39	13
1'x4' EPANL, 4000 Lumens, 5000K	EPANL 14 40L 50K	'00191723811605	*263C74	39	26

\*nominal lumen values

### Accessories: Order as separate catalog number

2X2SMK	2' x 2' Surface Mount Kit
2X4SMK	2' x 4' Surface Mount Kit
1X4SMK	1' x 4' Surface Mount Kit



DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

Visit [www.lithonia.com](http://www.lithonia.com) for more information.